

# **DIN Rail Analog Signal Isolated Converters**

(ONE IN ONE OUT, Optical Isolation)

#### **Features:**

- >> Accuracy grade: 0.1/0.2/0.5. Factory calibrated, the user can use directly
- >> Auxiliary power supply:  $5V/12V/15V/24VDC (\pm 10\%)$
- >> International standard signal input: 0-5V / 0-10V/1-5V, 0-10mA / 0-20mA/4-20mA
- >> Standard output signal: 0-5V / 0-10V/1-5V, 0-10mA / 0-20mA/4-20mA
- >> High linearity (nonlinearity <0.2%)
- >> DIN35 rail mounting
- >> Size: 80x70.0x25.0mm
- >> Strong anti-electromagnetic interference and high-frequency signal interference capability

## **Application:**

- >> Analog signal data isolation, collection and transformation
- >> Isolated 4-20mA or 0-20mA signal transmission
- >> Signal isolation and conversion of industrial site
- >> Long-term signal transfer without distortion
- >> Instrument signal transceiver
- >> Power monitoring, medical equipment isolation
- >> Ground interference suppression
- >> PLC / FA motor control signal isolation





# DIN11 IAP - $V(A)\square$ - $P\square$ - $V/A\square$

Input Signal			Power Supply		Output Signal				
Voltage	Code	Current	Code	Power	Code	Current	Code	Voltage	Code
0-5V	V1	0-1mA	A1	24VDC	P1	0-20ma	А3	0-5V	V1
0-10V	V2	0-10mA	A2	12VDC	P2	4-20ma	A4	0-10V	V2
0-75mV	V3	0-20ma	А3	5VDC	P3	User-defined	Az	1-5V	V6
0-2.5V	V4	4-20mA	A4	15VDC	P4			User-defined	Vz
User-defined	Vz	User-defined	Az	User-defined	Pz				

E-mail: sales@wayjun.net

#### Samples:

1. Input:4-20ma power supply:24VDC output:0-10V Part No.:DIN11 IAP A4-P1-V2

2. Input: 0-10V power supply:24VDC output: 0-10V Part No.:DIN11 IAP V2-P1-V2

3. Input:0-5V power supply:12VDC output:0-5V Part No.:DIN11 IAP V1-P2-V1

4. Input:0-3V power supply:24VDC output:4-20mA Part No.:DIN11 IAP Vz-P1-A4(Vz:0-3V)

### **Products Absolute Maximum Ratings:**

Continuous Isolation Voltage: 3000VDC

Operating temperature: +85 °C Storage Temperature: +150 °C

Soldering temperature): +300 °C (10 seconds)

Supply voltage range: ± 10% Vin

Note: If you exceed this range, maybe cause products damage permanently



### **General Parameters:**

Item	Test Condition	Min	Туре	Max	Units
Isolation Voltage	50Hz,1min.,leak current 1mA		2500		VDC
Isolation	Input/Power Supply/Output				
Impact Voltage	3KV, 1.2/50us(peak value)				
Operation Temperature		-25		+70	$^{\circ}\! \mathbb{C}$
Operation Humidity	No condensation	10		90	%
Storage Temperature		-45		+80	$^{\circ}$
Insulation Resistance		20			ΜΩ
Storage Humidity		10		95	$^{\circ}\!$

# **Input Parameters**


Item	impedance	Power loss	Over load capability	
0-5V	≥300KΩ		2.0 times Rated:	
0-10V	>500K22	Mount	Continuous	
0-1mA	1ΚΩ	Vout<	4 E timos Datadi	
0-10mA	TYP: 250Ω	lout<1.5W	1.5 times Rated: Continuous	
0-20mA	or user-defined		3.0 times Rated:1S	
4-20mA	or user-defined		o.o amee rated. 10	

# **Output Parameters**

Item	Over load capability	Response time	
4-20mA			
0-20mA	Load≦350Ω		
		≤1mS	
0-5V		211110	
0-10V	≥2KΩ		
1-5V			

Note: current output load needs 500ohm, please specified


## Size and wire diagram:(mm)

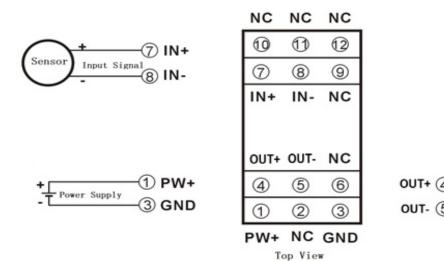

PIN	Name	Description	PIN	Name	Description
1	PW+	Power supply+	7	IN+	Signal input+
2	NC	NO PIN	8	IN-	Signal input-
3	GND	Power supply-	9	NC	NO PIN
4	OUT+	Signal output+	10	NC	NO PIN
5	OUT-	Signal output-	11	NC	NO PIN
6	NC	NO PIN	12	NC	NO PIN

E-mail: sales@wayjun.net



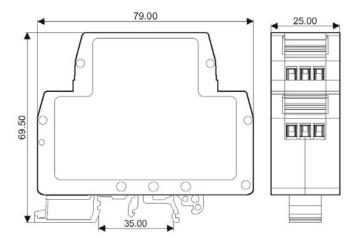

#### Note:

- 1. Before using, according to packing lists, and product labels, check the quantity, models and specifications
- 2. When measure the signal directly, please set the terminal tighten
- 3. There are no damaged insulation, conductive dust and corrosive fumes of metal in the environment
- 4. Installation pitch ≥10mm
- 5. We have adjusted well, do not adjust arbitrarily
- 6. Warranty: two years. But if clients damage products by themselves or tear off any labels on the product, we can not exchange

E-mail: sales@wayjun.net

- 7. Products can not been used in strong magnetic field
- 8. Internal no anti-lightning circuit
- 9. Specifications subject to change without notice